


SERVICE

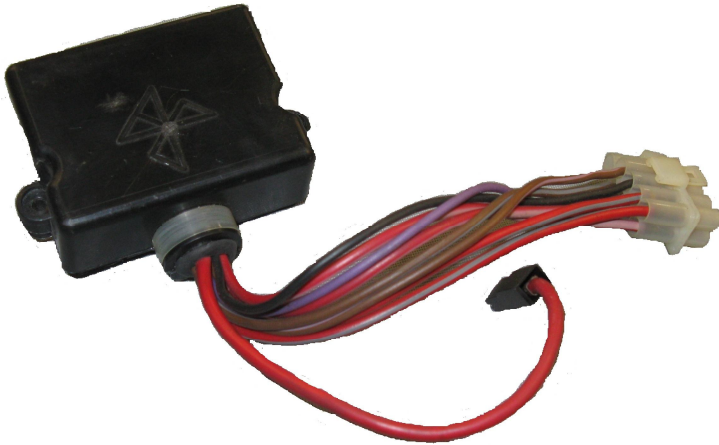

Order code:

DCP-09331

DCP-09332

Repair or upgrade Door Lock Module

A *standard* DeLorean **D**(oor) **L**(ock) **M**(odule) can cause defects in the lock solenoids if the solenoids got stuck in open or closed condition. To prevent damage to either lock solenoids and/or lock module the DLM needs upgrading. After repair and upgrading the unit is again ready for long time service.

DeLorean Car Project scan repair damaged standard DLM units if the **Printed Circuit Board** is in good condition.

If you need this service, please contact DCP to get details about the process.

What is repaired or replaced while servicing your DLM?

- * Repair of damaged parts, like diodes, PCB traces, bad soldering.
- * Replacement of 2 capacitors, 2 resistors, 2 transistors and 2 relays by new parts
- * Addition of two fuses. One in the 12 Volt wire feeding the PCB, with a mini blade fuse of 3A, and one in the 12 Volt wire feeding the capacitors (standard 5mm blade fuse of 10A). Both fuses protect the entire circuit against failure in the lock solenoids (stuck open/closed or shorted) making the circuit breaker obsolete.

Bestellen?

DLM *zonder* verbinding naar (alarm)systeem met deurver-/ontgrendeling op afstand: **DCP-09331**

DLM *met* verbinding naar (alarm)systeem met deurver-/ontgrendeling op afstand : **DCP-09332**

Warranty: 12 months

Download: -

Prices: see general price-list